


### COMMON


- Added accessories can affect a motorcycle's stability, performance and safe riding speed.

### SEAT COWL

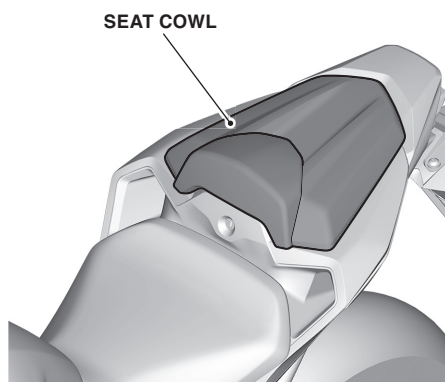

- Do not let anyone ride on the seat cowl and do not place luggage onto it.
- Check the accessory mounts frequently.
- Clean this accessory with a soft cloth soaked with a solution of mild detergent and water. Then wipe with a clean cloth soaked with water to clean dirt and detergent. Finally wipe dry with a soft, clean cloth.

### QUICK SHIFTER

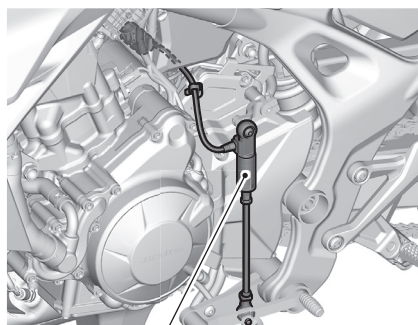

QUICK SHIFTER

- Do not disassemble the gear change pedal.
- If the gear position display is not normal, the shift feeling may change.
- When the shift change do not operate normally, the shift change by clutch operation can be operated.
- If the PGM-FI malfunction indicator lamp comes on or the gear position indicator flashes “-” in the current gear position, the Quick Shifter system may not operate. If either of the above occurs, contact your dealer as soon as possible.


### HOW TO USE THE QUICK SHIFTER

- This accessory enable the shift change without clutch operation when shifting up and down during acceleration. (Engine speed is more than 1,600 rpm on upshifting or more than the idle speed on downshifting).
- This system does not function when upshifting with the throttle closed.
- This system does not function when the clutch lever is being operated.


### QUICK SHIFTER SETTING


- The Quick Shifter can be individually turned OFF (deactivate), also the shift pedal load lever for activating the Quick Shifter can be adjusted during up and down shifting.

1. Turn the ignition switch to ON position.
2. Push and hold the SEL RIGHT switch to enter the setting mode.

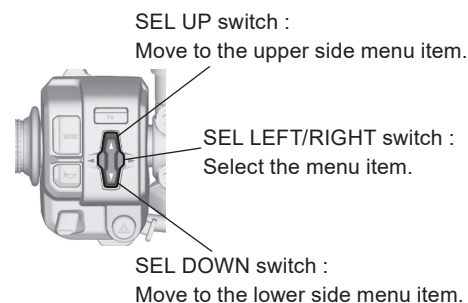

3. Select the “FUNCTION” and “QUICK SHIFTER”.

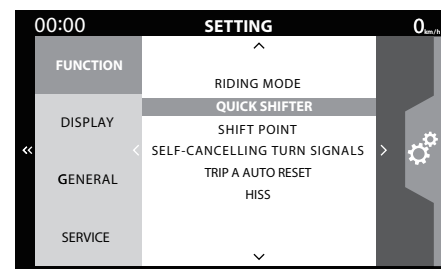

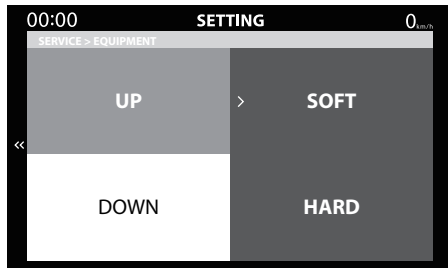


- UP :  
Change the setting for upshifting.
- DOWN :  
Change the setting for downshifting.

OFF	Deactivate
SOFT	Activate
MEDIUM	
HARD	


- SOFT, MEDIUM or HARD indicate the load level of the shift pedal.

1. Select the "UP", or "DOWN" using the SEL ▲ or ▼ switch.
2. Select the desired setting using the SEL switch.
3. Return to the ordinary display to complete the setting.

- You can also perform the above settings by using the touch screen.

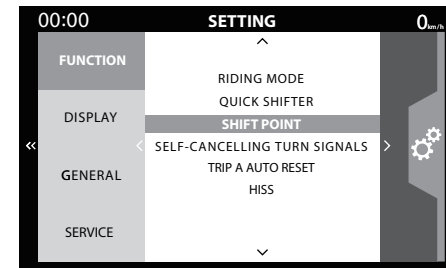

3. Select the "FUNCTION" and "SHIFT POINT".

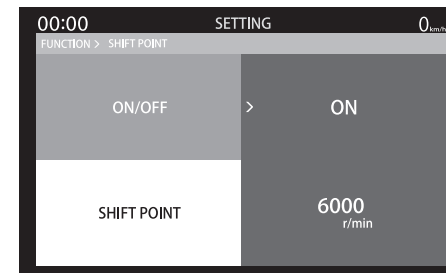


- ON/OFF :  
You can activate or deactivate the shift up mode.
- SHIFT POINT :  
You can change the engine revolutions at which the tachometer start blinking in the shift up mode.

1. Select the "ON/OFF", or "SHIFT POINT" using the SEL ▲ or ▼ switch.
2. Select the desired setting using the SEL switch.
3. Return to the ordinary display to complete the setting.

- You can also perform the above settings by using the touch screen.

### MAIN STEP

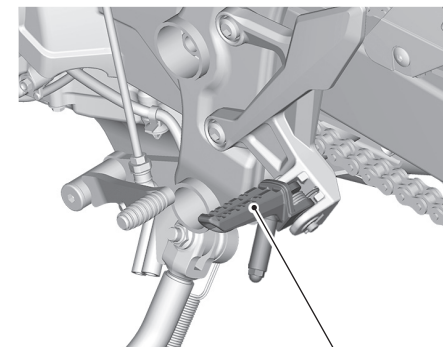



- Check the accessory mounts frequently.
- Clean this accessory with a soft cloth soaked with a solution of mild detergent and water. Then wipe with a clean cloth soaked with water to clean dirt and detergent. Finally wipe dry with a soft, clean cloth.

### SHIFT UP MODE SETTING


- When shift up mode is ON, the tachometer colour changes according to the shift point setting.
- The tachometer blinks yellow when the engine revolutions exceeds the set value of SHIFT POINT.

1. Turn the ignition switch to ON position.
2. Push and hold the SEL RIGHT switch to enter the setting mode.

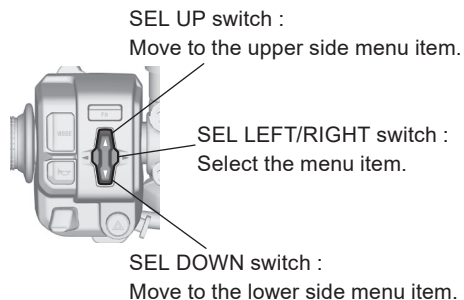


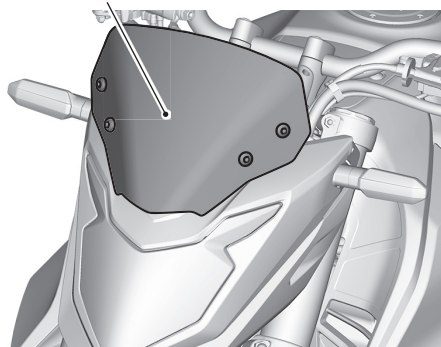**METER VISOR****METER VISOR**


- Handle this accessory with care. It can be damaged when it is bent excessively or is subject to strong shock or impact.
- Park the motorcycle in the shade when it is to be left unattended in the summer for an extended period of time with a body cover placed over it.
- Failure to observe this precaution can cause this accessory to be deformed due to heat built up under the body cover.
- Select a firm, level surface when you park the motorcycle. Also bear in mind that strong wind can cause the motorcycle to topple to the ground.
- Check the accessory mounts frequently and retighten if necessary.
- When this accessory becomes dirty, rinse it thoroughly with cool water to remove loose dirt, then wipe with a clean cloth or sponge. Do not use a brush to clean this accessory as it may scratch the surface.
- Never use organic solvents such as gasoline, thinner or benzene to clean this accessory. Also do not use acid or alkaline cleaners.
- Wipe up spilled brake fluid at once as it may damage the plastic surface.

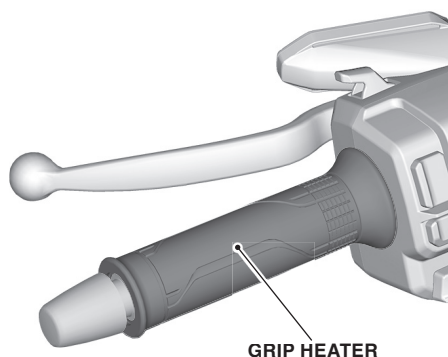**GRIP HEATER****GRIP HEATER**


- This accessory is replaced with the grip heater combined with the throttle pipe. Therefore, the throttle operation has a different feeling after installation.
- Check the accessory mounts frequently.
- Clean this accessory with a soft cloth soaked with a solution of mild detergent and water. Then wipe with a clean cloth soaked with water to clean dirt and detergent. Finally wipe dry with a soft, clean cloth.

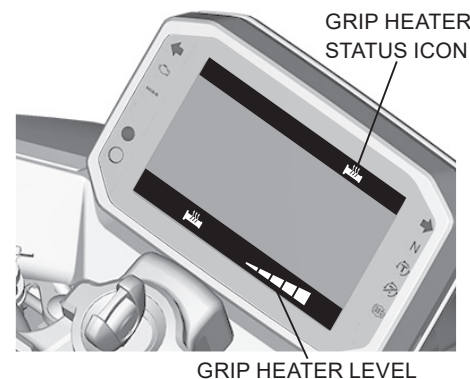**GRIP HEATER STATUS ICON**

- Displayed when the grip heater is on.
- If the grip heater system has an error, the grip heater status icon and grip heater level will blink. If it occurs, see your Honda dealer as soon as possible.

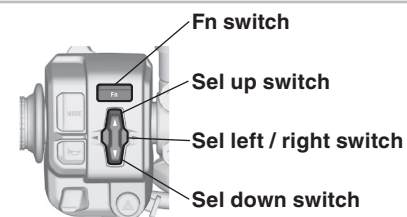**HOW TO USE THE GRIP HEATER**

1. Start the engine.
2. Select the grip heater of multi function using the Fn switch.
3. Push up or down the Sel switch to select the grip heater level.
4. To turn off the heater, push the Sel switch several times until the grip heater status icon goes off.

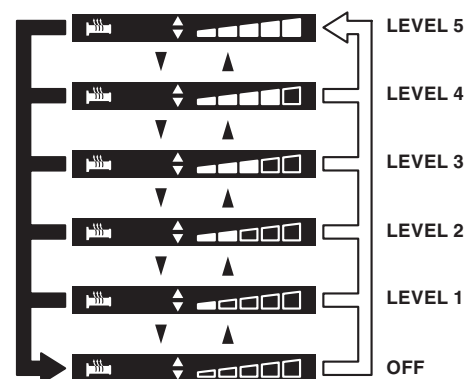


▼ / ▲ Push the Sel switch.

➡ Push and hold the Sel switch ▼.

➡ Push and hold the Sel switch ▲.


### SKID PAD

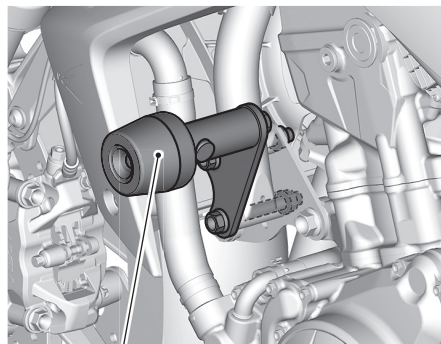

SKID PAD

- Check the accessory mounts frequently.
- Clean this accessory with a soft cloth soaked with a solution of mild detergent and water. Then wipe with a clean cloth soaked with water to clean dirt and detergent. Finally wipe dry with a soft, clean cloth.


### TANK PAD

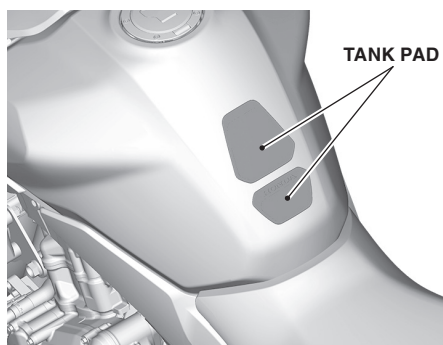

TANK PAD

- Check the accessory mounts.
- Clean this accessory with a soft cloth soaked with a solution of mild detergent and water. Then wipe with a clean cloth soaked with water to clean dirt and detergent. Finally wipe dry with a soft, clean cloth.


### BAR ENDS

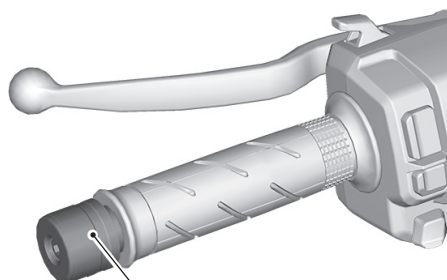

GRIP END

- Check the accessory mounts frequently and retighten if necessary.
- Clean this accessory with a soft cloth soaked with a solution of mild detergent and water. Then wipe with a clean cloth soaked with water to clean dirt and detergent. Finally wipe dry with a soft, clean cloth.


### HANDLE UPPER HOLDER

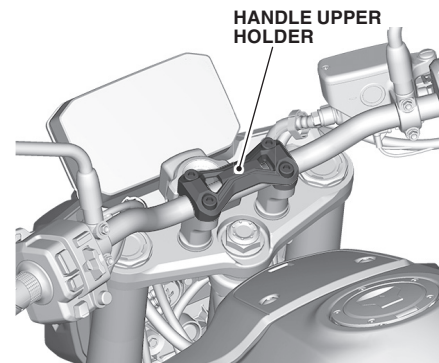

HANDLE UPPER HOLDER

- Check the accessory mounts frequently.
- Clean this accessory with a soft cloth soaked with a solution of mild detergent and water. Then wipe with a clean cloth soaked with water to clean dirt and detergent. Finally wipe dry with a soft, clean cloth.


### WHEEL STRIPE



WHEEL STRIPE

- Check the accessory mounts.
- Clean this accessory with a soft cloth soaked with a solution of mild detergent and water. Then wipe with a clean cloth soaked with water to clean dirt and detergent. Finally wipe dry with a soft, clean cloth.
- Do not wash the motorcycle with a high-pressure washer, as this may peel off the wheel stripes.

### HIGH TEXTURE SEAT

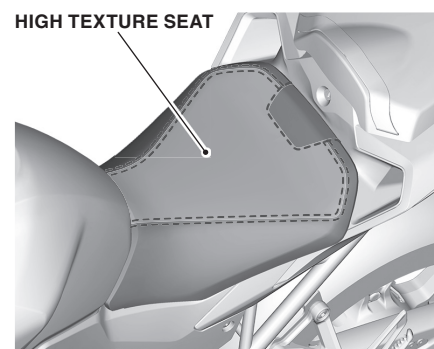



HIGH TEXTURE SEAT

- Remove dirt with a soft brush, cloth or a vacuum cleaner.
- After removing dirt, using a white slightly wet cotton cloth to wipe the surface off. Please do not use the print processed cloth or blotting paper to prevent from the color transfer.
- Use a slightly wet soft cloth or sponge, and make sure not to be soaked. Then wipe the surface off again with a clean wet cloth and make sure to dry it overnight. After cleaning, gently brush the surface of the high texture seat with a soft brush.



## SIDE BAG

## SIDE BAG ATTACHMENT

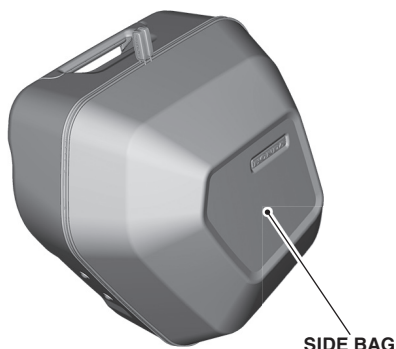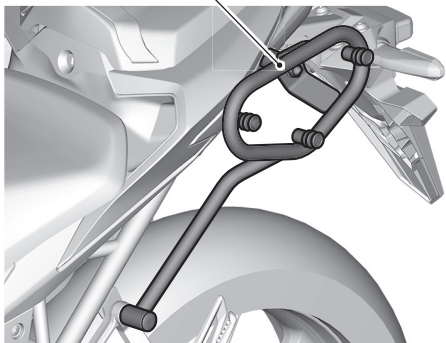


SIDE BAG

## ⚠ CAUTION

To prevent burns, allow the engine, exhaust system, radiator, etc., to cool before installing and removing the accessory.



- The weight of the cargo must not exceed the following maximum weight capacity:  
**Right side bag 4.0 kg (8.8 lb)**  
**Left side bag 4.0 kg (8.8 lb)**
- Load weight equally on both sides to minimize imbalance. If the weight is not loaded equally on both sides or if it exceeds the maximum weight capacity of this accessory, handling is proportionally affected, resulting in serious accident or injury.
- Do not store valuables or fragile articles in the side bags.
- Be sure that the side bags are installed securely before riding.
- Before riding, confirm that lid is closed.
- Especially the lower part of the side bag on the right side is close to the muffler and thus becomes very hot, for that reason it should not be touched for some time.
- The side bags are not perfectly watertight, and water may enter when washing the motorcycle, when it rains, etc.
- Use the included waterproof inner bag when riding in the rain.
- Always install the side bags on both the left and the right side.
- Don't place a heavy object on the opened lid or apply an excessive force from the top of opened lid.
- Open and close the lid gently.
- Check the accessory mounts frequently.
- Clean this accessory with a soft cloth soaked with a solution of mild detergent and water. Then wipe with a clean cloth soaked with water to clean dirt and detergent. Finally wipe dry with a soft, clean cloth.
- Store away from direct sunlight, high temperature and humidity. There is a risk of discoloration or fading.

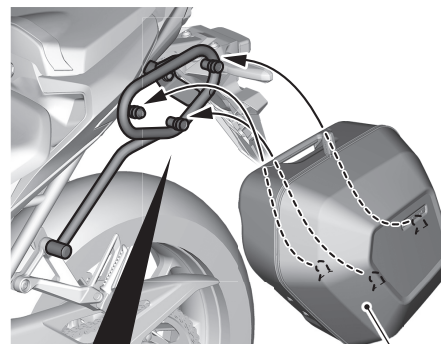

LEFT SADDLEBAG


## HOW TO INSTALL THE SIDE BAG

1. Install the left side bag as shown.
  - Be sure that side bag is installed securely.
  - Repeat on the right side.

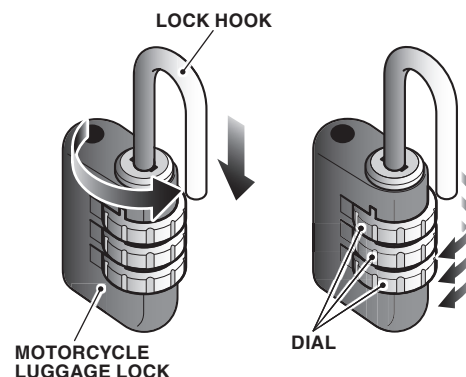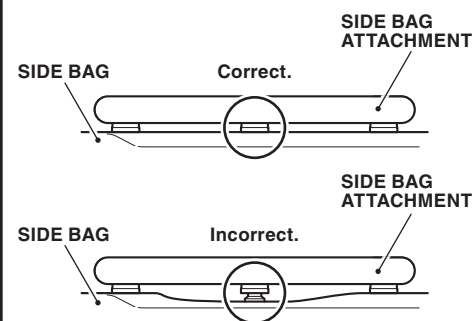




## HOW TO USE THE MOTORCYCLE LUGGAGE LOCK

1. Press and hold the lock hook down while it is in the open position as shown.
2. Turn the dials to set your own code.
3. Pull the lock hook up to finish.
  - Do not forget your new code.

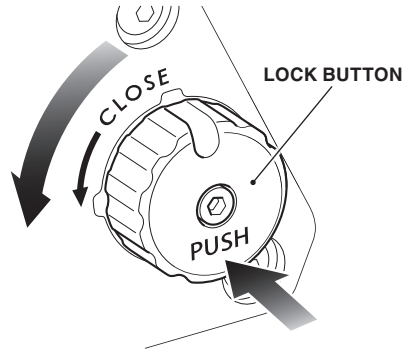


### HOW TO LOCK THE SIDE BAG

1. Push and hold the lock button and turn it in the direction of the arrow to lock.
  - When leaving the vehicle with the side bag loaded, use the lock button and motorcycle luggage lock.
  - Remove the motorcycle luggage lock and store it in the side bag pocket when riding to avoid damaging the side bag.
  - Repeat on the right side.

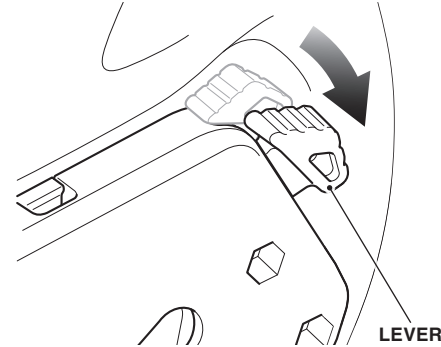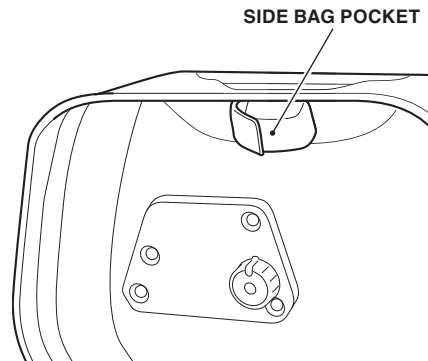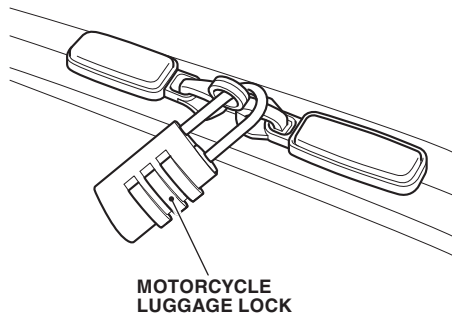


### HOW TO REMOVE THE SADDLEBAG

1. Lower the lever as shown and remove the left saddlebag.
  - Repeat on the right side.

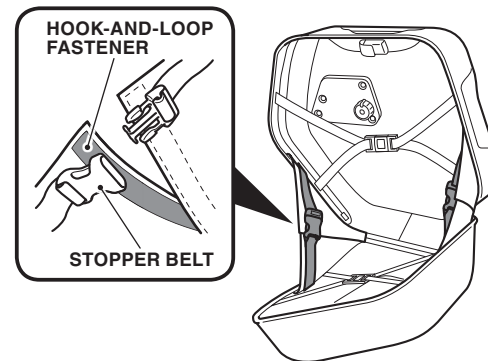


### HOW TO FULLY OPEN THE SIDE BAG

1. Open the lid.
2. Unbuckle the stopper belt and unfasten the hook-and-loop fastener.

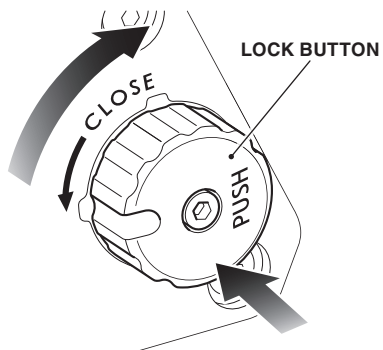

### HOW TO UNLOCK THE SIDE BAG


1. Push and hold the lock button and turn it in the opposite direction of the arrow to unlock.
  - Repeat on the right side.

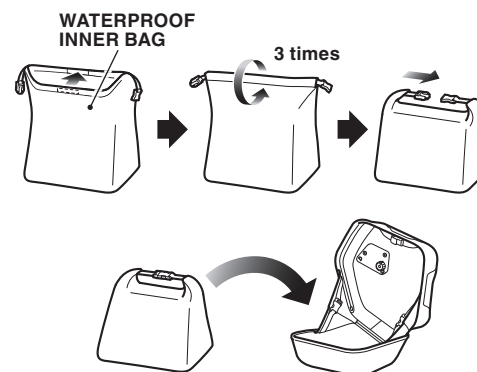

### HOW TO USE THE WATERPROOF INNER BAG


1. Use the waterproof inner bag as shown.
  - Be careful not to pinch the stored item when the side bag is closed.

### REAR SEAT BAG

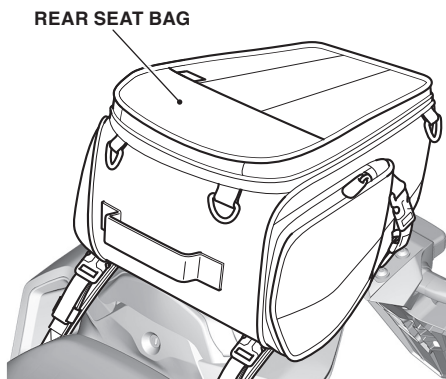


- The weight of the cargo must not exceed the following maximum weight capacity:  
**Rear seat bag 4.0 kg (8.8 lb)**
- Check the accessory mounts frequently.
- Clean this accessory with a soft cloth soaked with a solution of mild detergent and water or a cleaner.
- Do not store valuables or easily breakable items in the seat bag.
- Be sure that the fastener is closed securely before riding.
- The rear seat bag is not perfectly watertight, and water may enter when washing the motorcycle, or when it rains.

### REAR SEAT BAG

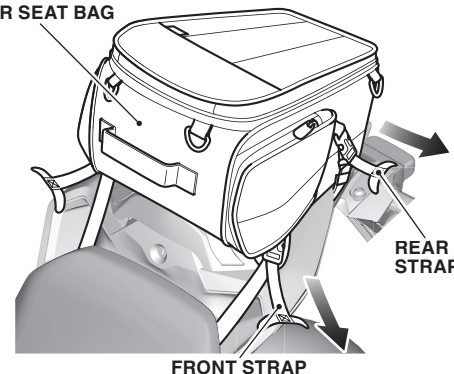


2. Tighten the straps while adjusting the balance between the right and left sides of the rear seat bag as shown.
  - Repeat on the right side.
  - Secure well by pulling the straps tight.
3. Secure the front straps end as shown.

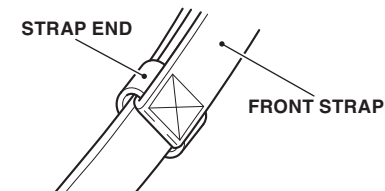


### HOW TO INSTALL THE REAR SEAT BAG

#### REAR SEAT BAG

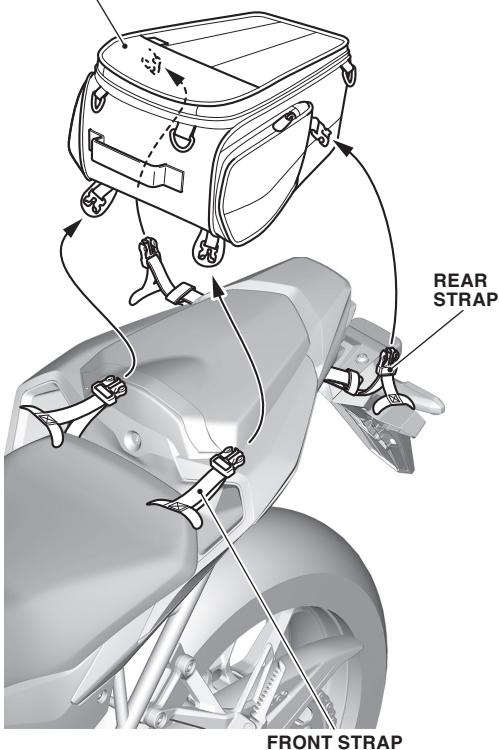


- The procedure for installing the rear seat bag to the luggage base is the same as the procedure below.
1. Install the rear seat bag as shown.


#### STRAP

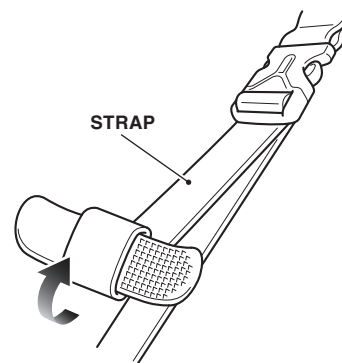

4. Wind the strap as shown.
5. Secure the strap end as shown.

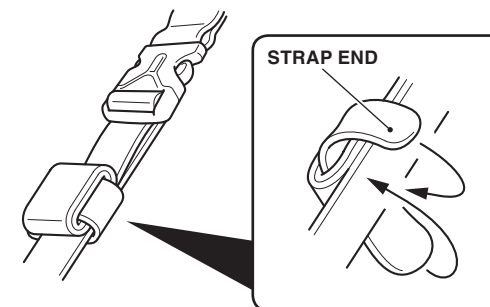


### REAR SEAT BAG

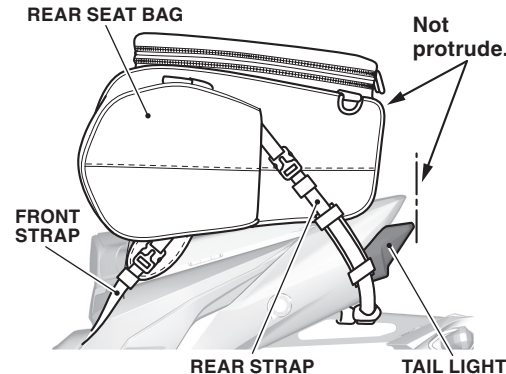

6. Secure the other straps in the same manner.
7. Make sure that the rear seat bag does not protrude to the rear of the tail light as shown.
  - If the rear seat bag protrudes, adjust the tensions of front strap and rear strap.


# CB750A

## Genuine Accessory User's Guide

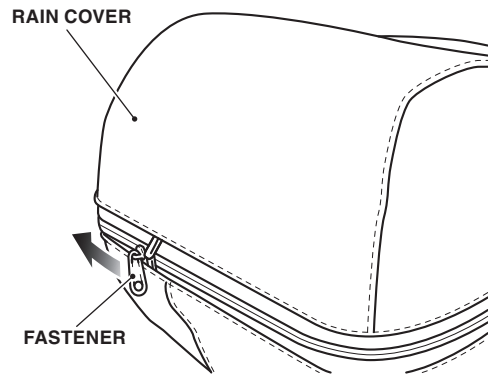


### HOW TO USE THE RAIN COVER

1. Open the fastener as shown.
  - Perform this step on extended the rear seat bag.

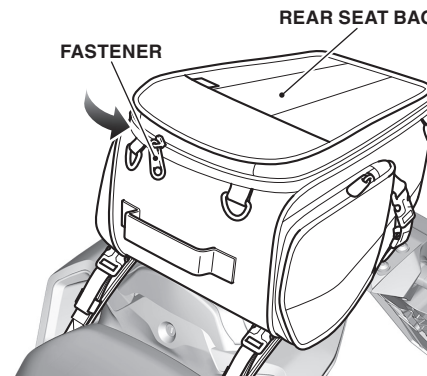


### HOW TO USE THE EXTENDED REAR SEAT BAG

1. Open the fastener as shown.


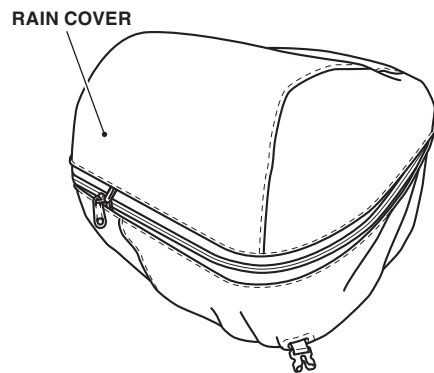


2. Temporarily release the buckles and pass them through the rain cover holes as shown.

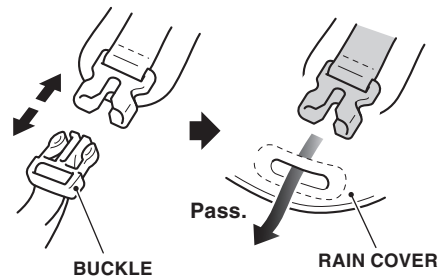

3. Cover the rain cover as shown.

4. Lock the buckles as shown.

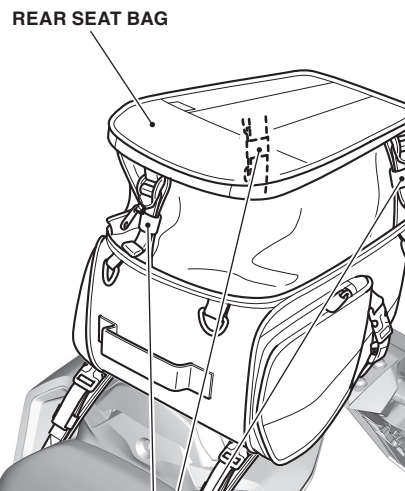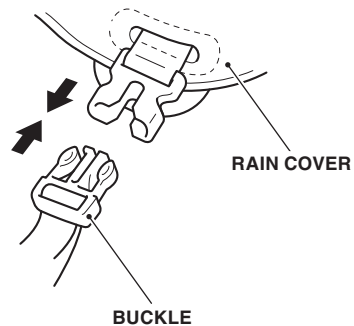


2. Pull up the rear seat bag as shown.

Firmly pull to secure the belts.




### TANK BAG

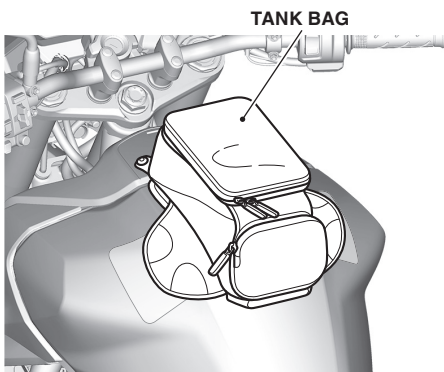

- The weight of the cargo must not exceed the following maximum weight capacity:  
**Tank bag 1.5 kg (3.3 lb)**
- Be sure that the tank bag is installed securely before riding.
- Check the accessory mounts frequently and retighten if necessary.
- Before riding, close the tank bag.
- Be sure that the fastener is closed securely before riding.
- The tank bag is not perfectly watertight, and water may enter when washing the motorcycle, or when it rains.
- Do not store valuables or fragile articles in the tank bag.
- When washing the motorcycle and when leaving the motorcycle, remove the tank bag.
- Before installation, remove all dust, sand, etc. from fuel tank and tank bag, as otherwise the fuel tank may be damaged.
- Clean this accessory with a soft cloth soaked with a solution of mild detergent and water. Then wipe with a clean cloth soaked with water to clean dirt and detergent. Finally wipe dry with a soft, clean cloth.

#### WHEN THE TANK BAG IS REMOVED


- When riding with the tank bag removed, make sure to remove the strap to return to the original state.

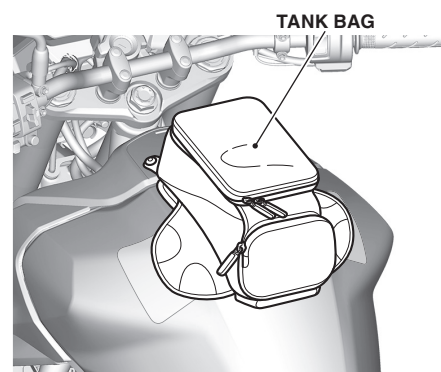

2. Install the tank bag as shown.
3. Cover the tank bag with the rain cover if necessary.

#### HOW TO INSTALL THE TANK BAG

1. Lock the buckle as shown.
  - Repeat on the right side.

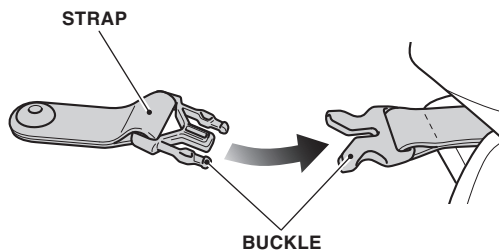

## SAFETY INFORMATION

The following sentences show the label meaning.  
Some labels warn you of potential hazards that could cause serious injury.  
Others provide important safety information.  
Read this information carefully and don't remove the label.

If a label comes off or becomes hard to read, contact your Honda dealer for a replacement.

There is a specific symbol on each label. The meanings of each symbol and label are as follows.



Read the use and care information in installation instructions or genuine accessory user's guide carefully.  
Read the **LOAD LIMITS AND GUIDELINES**, and **TYRES** sections in owner's manual.



**DANGER (with RED background)**

You WILL be KILLED or SERIOUSLY HURT if you don't follow instructions.

**WARNING** (with ORANGE background)


You CAN be KILLED or SERIOUSLY HURT if you don't follow instructions.

**CAUTION (with YELLOW background)**

You CAN be HURT if you don't follow instructions.

Refer to this information for the meanings of the symbols shown on the accessory.

## TOP BOX & PANNIER WARNING LABEL

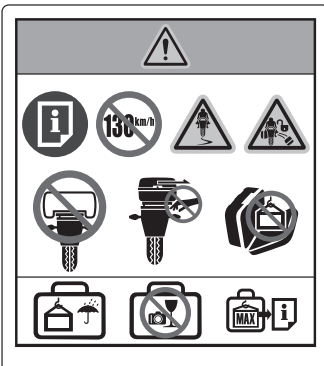

Never ride a motorcycle equipped with accessories and a cargo at speeds above 130 km/h (80 mph).



Added accessories and cargo can reduce a motorcycle's stability, performance and safe riding speed. A motorcycle's stability is influenced by an improper loading, worn or under-inflated tyres, the overall motorcycle condition and environmental conditions.



When driving with the motorcycle, all locks of all bags must be securely locked. Panniers or top box may fall off if not locked properly to the carrier or stay. Check for secure locking before riding.



When the carrier base is used as a rear carrier without mounting the top box, load the cargo on the carrier base in such a manner that the ability of the carrier base to slide is not impaired.



Do not insert your fingers or your hand into the bracket installation part at the bottom of the top box. Your fingers may get caught between top box and bracket.



Heavy cargo placed on the opened lid can damage the pannier or top box and the lid.



Entry of water is possible when the vehicle is washed etc.



Please be careful when placing important objects into the box. Also be careful with breakable and valuable items. Do not leave valuable items in the bags.



Regarding the maximum loading capacity.  
Read the use and care information carefully in each of the accessory installation instructions or genuine accessory user's guide.