

PASSENGER AUDIO SWITCH AND ATTACHMENT

Accessory Name	Parts Number	Application Model	Issue Date	Publication No.	FRT
PASSENGER AUDIO SWITCH AND ATTACHMENT	08A70-MKC-A00	GL1800/D/DA/DAX/ DAY/DAZ/X/Y/BD/BDX/ BDY/BDZ	2025.02	MII	0.2 H

Introduction

ALL INFORMATION, ILLUSTRATIONS, DIRECTIONS AND SPECIFICATIONS INCLUDED IN THIS PUBLICATION ARE BASED ON THE LATEST PRODUCT INFORMATION AVAILABLE AT THE TIME OF APPROVAL FOR PRINTING. Honda Motor Co., Ltd. RESERVES THE RIGHT TO MAKE CHANGES AT ANY TIME WITHOUT NOTICE AND WITHOUT INCURRING ANY OBLIGATION WHATSOEVER. NO PART OF THIS PUBLICATION MAY BE REPRODUCED WITHOUT WRITTEN PERMISSION. THIS MANUAL IS WRITTEN FOR PERSONS WHO HAVE ACQUIRED BASIC KNOWLEDGE OF MAINTENANCE ON Honda MOTORCYCLES, MOTOR SCOOTERS OR ATVS.

Honda Dealer:







Please give a copy of these instructions to your customer.

Customer:

Because it requires specialized knowledge and special tools and equipment, it is recommended to install it at a dealer with qualified automobile maintenance.

How To Read These Symbols

Your safety, and the safety of others, is very important. To help you make informed decisions we have provided safety messages and other information throughout this manual.

-  **WARNING** You CAN be KILLED or SERIOUSLY HURT if you don't follow instructions.
-  **CAUTION** You CAN be HURT if you don't follow instructions.
-  **NOTICE** The purpose of this message is to help prevent damage to your vehicle, other property, or the environment.
-  **NOTE** Things you want to know, things that are useful to know.
-  Follow the instructions of the Service Manual.
-  Follow the other symbol instructions of the "Installation Instructions BASIC".

Instruction Other Symbols

The symbols used throughout this instructions show specific service procedures. Refer to "Installation Instructions BASIC" for description of each symbol.

INFORMATION

CAUTION

- To prevent burns, allow the engine, exhaust system, radiator, etc., to cool before installing the accessory.


NOTICE

- Take care not to damage the painted surfaces of the motorcycle.

NOTE:

- Reinstall the removed parts on the motorcycle and make sure that the wires and harnesses are not pinched.
- Disconnect the negative (–) cable from the battery before installing this accessory.
- Trim the excess ends off the wire ties after attaching them to the wire harnesses. Do not allow the cut part of the wire tie to interfere with another harness or brake hose.
- After reconnecting the battery, refer to the motorcycle Owner's Manual and set the meter.
- After this accessory installation, check the lights (e.g. right/left turn signal lights and brake lights) for proper operation.
- Setting is necessary after installing this accessory
- Save all removed parts unless otherwise indicated.


TORQUE INFORMATION

Refer to the Service Manual for the torque values including standard torque of the removed parts. ()


PARTS LIST


When the instruction manual and installation instructions are included in this kit, be sure to give them to the customer.


<PASSENGER AUDIO SWITCH AND ATTACHMENT>

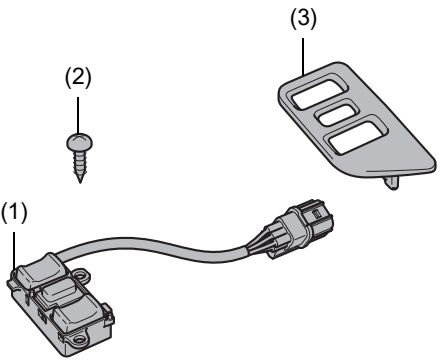Component	No.	Parts Name	Qty	Parts No.
	(1)	Passenger audio switch assembly	1	-
	(2)	4 x 10 mm screw	2	93903-24280
	(3)	Right saddlebag cover	1	-


INSTALLATION


1. Refer to the Service Manual for motorcycle, remove the motorcycle parts as shown. 

 (Right side only)
Step 3

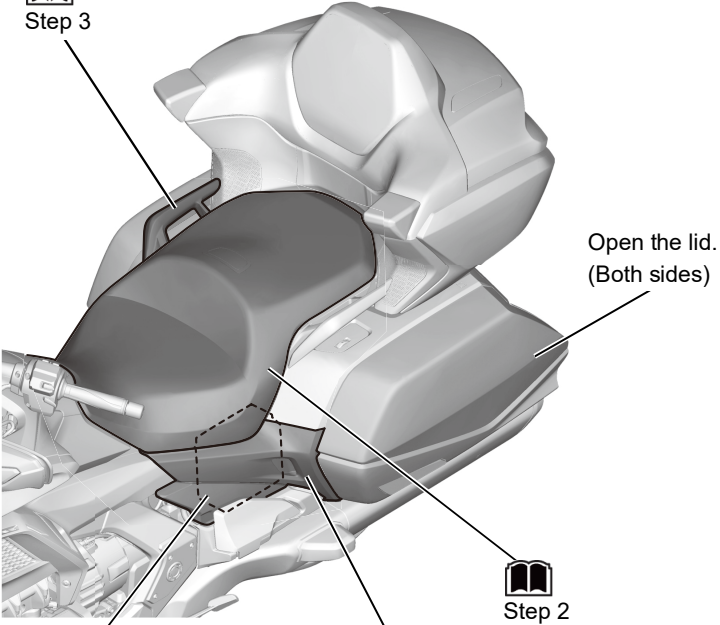

Open the lid.
(Both sides)


 Step 2

 (Both sides)
Step 1

Disconnect the
battery (–) cable.

INSTALLATION IMAGE

<RIGHT SIDE>




2. Remove the motorcycle parts as shown.

<RIGHT SIDE>

RIGHT SADDLEBAG
SWITCH COVER



DUMMY CONNECTOR

MOTORCYCLE'S HARNESS

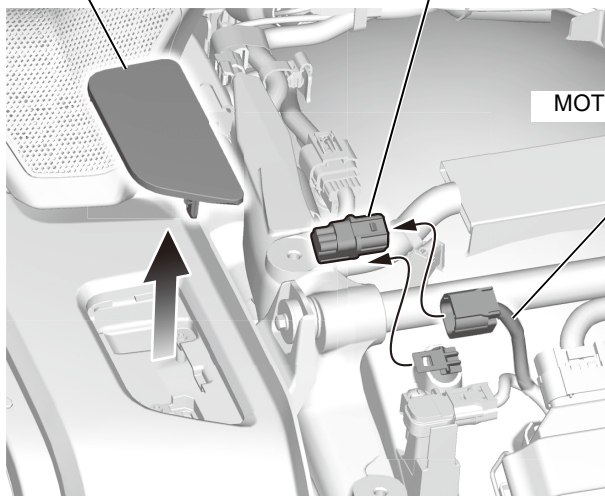


3. Install as shown.

<RIGHT SIDE>

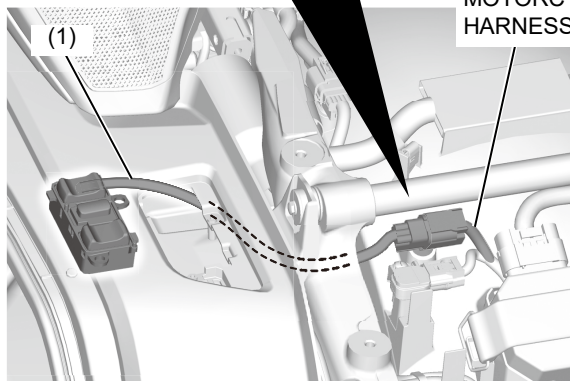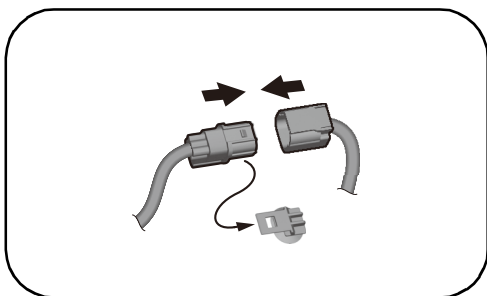

MOTORCYCLE'S
HARNESS

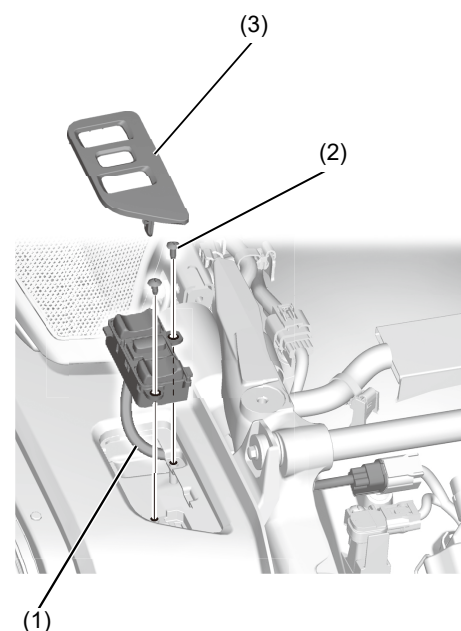

4. Install the motorcycle parts in the reverse order of removal.
 - Confirm that any harness is not caught or too tight.