



INSTALLATION INSTRUCTIONS

Accessory

TOP BOX BASE
P/N 08L71-K35-J01

Application

WW125/150


Publication No.

MII

Issue Date

March 2018

PARTS LIST

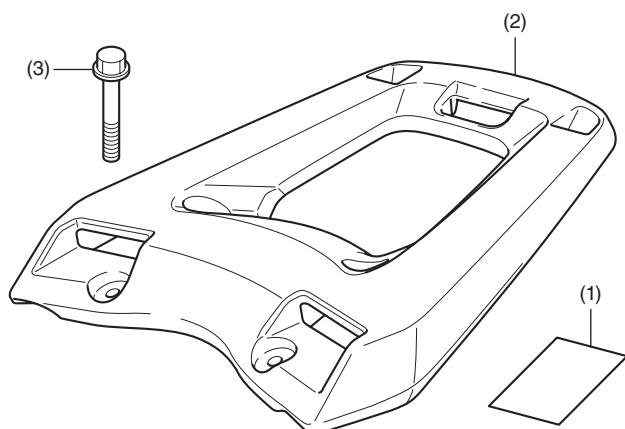

No.	Description	Qty
(1)	URL paper	1
(2)	Carrier base	1
(3)	8 mm flange bolt	4

TOOLS REQUIRED

Socket (12 mm)

Ratchet

Torque wrench

TORQUE CHART

Tighten all screws, bolts, and nuts to their specified torque values. Refer to the Service Manual for the torque values of the removed parts.

Item	N·m	kgf·m	lbf·ft
8 mm flange bolt	27	2.8	20


MAXIMUM LOADING CAPACITY

- The weight of the cargo must not exceed the following maximum loading capacity:



Maximum Loading Capacity	
Top box	3.0 kg (6.6 lb)

INSTALLATION


- Open the seat as shown.

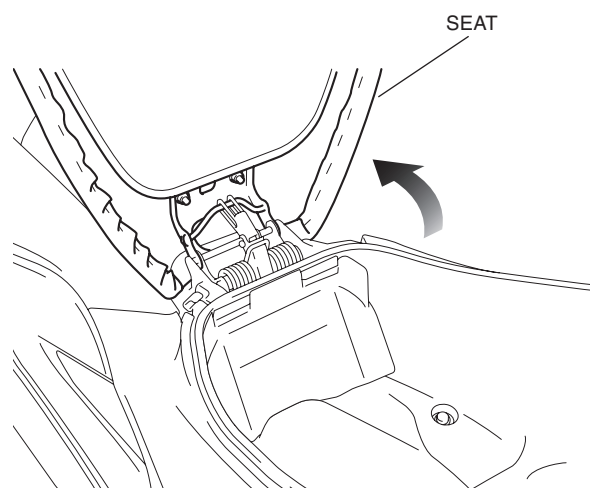


- Remove the grab rail cover as shown.

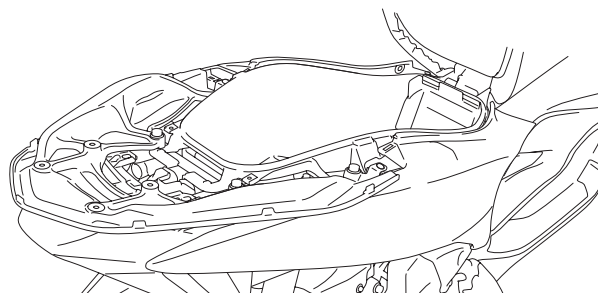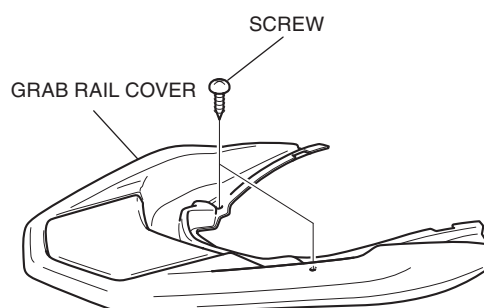

3. Remove the grab rail cover lid as shown.

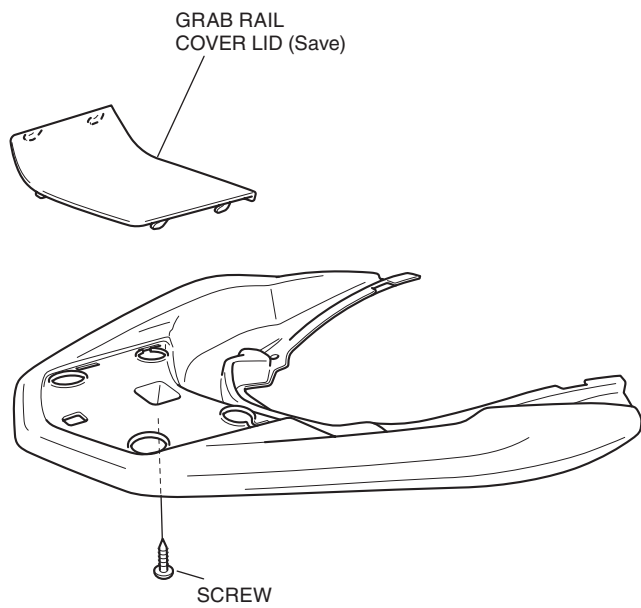

4. Install the carrier base as shown.

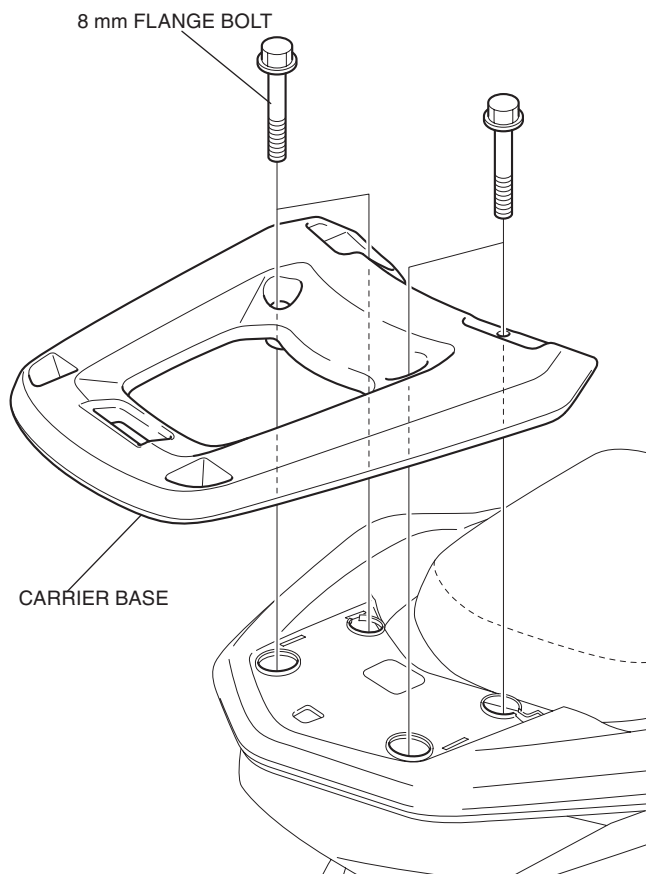

5. Refer to the Genuine Accessory User's Guide that comes together with the top box, and install the top box according to the instruction.